

記號 MARK	設置內容 MODIFICATION	日期 DATE	修改 DRAW	核准 APPROVE
△				

0.98*(250mm) pitch single row headers

CW325 Aeries

Poles:2-20

Material:insulator:NYLON UL 94V-2

Conroxr:0.64mm(.25")square pin:brass:tin plated 60u'

Mates wite CH325 series housing

Specifications

Current rating:3A AC,DC

Voitoge rating:250V AC,DC




Temperature range:-25°~85°C

insulation resistance:1,000 ACminute

Applicable PC board thickness:1.63*(1.6mm)





CW325S

Straight Angle

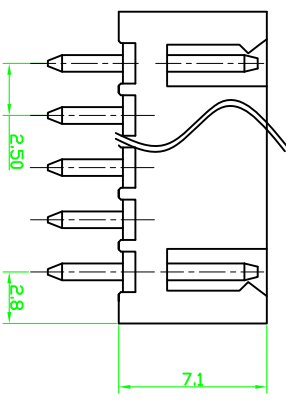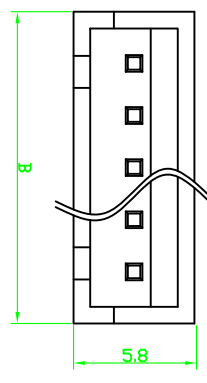

CW325R

Right Angle

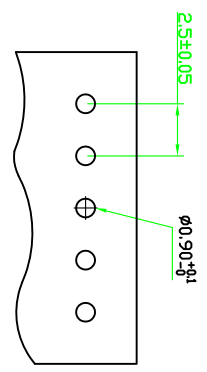

CIRCUITS	PATE NO	DIM.A	DIM.B	CIRCUITS	PATE NO	DIM.A	DIM.B
2	CW325X-02	2.50	7.45	12	CW325X-12	27.50	32.45
3	CW325X-03	5.00	9.95	13	CW325X-13	30.00	34.95
4	CW325X-04	7.50	12.45	14	CW325X-14	32.50	37.45
5	CW325X-05	10.00	14.95	15	CW325X-15	35.00	39.95
6	CW325X-06	12.50	17.45	16	CW325X-16	37.50	42.45
7	CW325X-07	15.00	19.95	17	CW325X-17	40.00	44.95
8	CW325X-08	17.50	22.45	18	CW325X-18	42.50	47.45
9	CW325X-09	20.00	24.95	19	CW325X-19	45.00	49.95
10	CW325X-10	22.50	27.45	20	CW325X-20	47.50	52.45
11	CW325X-11	25.00	29.95				

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X	±0.30
.XX	±0.20
.XXX	±0.10
.X°	±3.0°
.XX°	±2.0°
.XXX°	±1.0°

承永實業有限公司

繪圖 / 日期 Draw / Date	2005.05.14	單位 Units	MM	名稱 / 料號 Title / Part No.	WAFFER 2.50 DIP 系列 CW325X-XX
審核 / 日期 Check By/Date		比例 Scale	1:1	材質 Material	
批准 / 日期 App. By/Date		頁次 SHEET	1/1	角法 PRDL.	
					顏色 Color
					版本 REV.
					B