
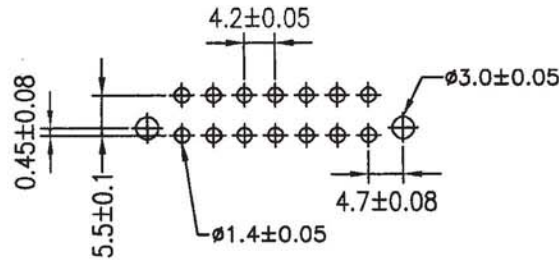







P/N: CW4201S-2xXX

P/N: CW4201SA-2xXX



P.C. Board Layout

P.C. Board Layout

CW4201-2xXX Series

- * Poles:2-24
 - * Material:Insulator:NYLON66 UL94V-2 Natural
 - * Contact:brass,tin plated 60u"
 - * Mates with CH4201-2xXX series housing
- Specifications
- * Current rating: 8A AC, DC
 - * Voltage rating:500V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 1500V AC/minute
 - * Applicable PC board thickness: .063" (1.6mm)

DIM."A"&"B" tolerance as followings:

- 2x1P~2x4P±0.20
- 2x5P~2x8P±0.30
- 2x9P~2x12P±0.40

CKTS	PART NO.	DIM. "A"	DIM. "B"
2	CW4201SX-2X1		5.2
4	CW4201SX-2X2	4.20	9.4
6	CW4201SX-2X3	8.40	13.6
8	CW4201SX-2X4	12.60	17.8
10	CW4201SX-2X5	16.80	22.0
12	CW4201SX-2X6	21.00	26.2
14	CW4201SX-2X7	25.20	30.4
16	CW4201SX-2X8	29.40	34.6
18	CW4201SX-2X9	33.60	38.8
20	CW4201SX-2X10	37.80	43.0
22	CW4201SX-2X11	42.00	47.2
24	CW4201SX-2X12	46.20	51.4

丞永實業有限公司

BLUE SOURCES ELECTRONICS CO.,LTD.

TITLE 4.20mm pitch 180° Power Connectors

PART NO. CW4201SX-2xXX

DWG.NO. CW4201SX-2xXX

TOLERANCE	DRAWN	許建華	DATE	2005.11.02
DIM.	CHECK		DATE	
0. ±0.50	APPROVE		DATE	
0.0 ±0.30	SCALE		UNIT	mm
0.00 ±0.20				