



P.C.B LAYOUT  
TOP VIEW

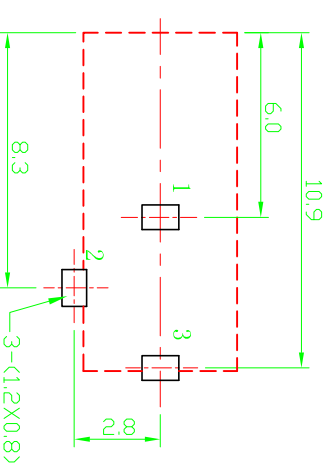

**SCHEMATIC**



PIN	φ1.0	φ1.3
APPD.		

**SPECIFICATION**

1. Rating: DC 30V 0.5A
2. Contact resistance :  $\leq 0.03\Omega$
3. Insulation resistance :  $\geq 100M\Omega$  (DC250V)
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		UNIT: MM		TYPE:		MODEL NO:		PAGE 1 OF 1	
x	±0.30	DC POWER JACK	DC000010-X	PAPER NO: A4	SCALE	VER	4:1	1	
xx	±0.20								
xxx	±0.10								
x°	±3.0°								
xx°	±2.0°								
xxx°	±1.0°								
DESIGNER BY:									
CHECK BY:									
APPROVED BY:									

丞永實業有限公司  
BLUE SOURCES ELECTRONICS CO.,LTD.