



P.C.B LAYOUT
TOP VIEW

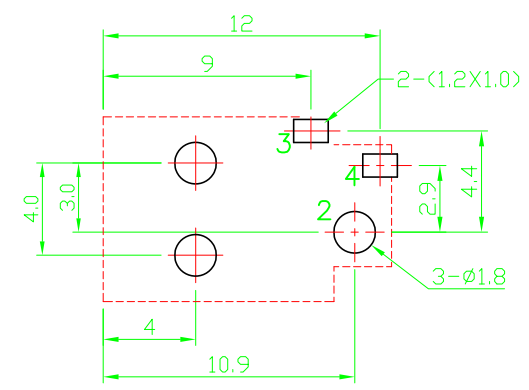

SCHEMATIC



SPECIFICATION
 1.Rating :DC 30V 0.5A
 2.Contact resistance :≤0.03Ω
 3.Insulation resistance : ≥100MΩ (DC250V)
 4.Withstand voltage :500VAC
 5.Insertion and extraction force :3-20N
 6.life test :5,000 cycles

4	CURVE PIEVE	1	BRASS	Ag-Plating
3	SPRING	1	BRONZE	Ag-Plating
2	PIN	1	H59 BRASS	Cu-Sn-Plating
1	HOUSING	1	PA66/PBT	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

<small>UNLESS OTHERWISE SPECIFIED TOLERANCES ARE</small> .x ±0.30 .xx ±0.20 .xxx ±0.10 .x° ±3.0° .xx° ±2.0° .xxx° ±1.0°	UNIT: MM	TYPE:	MODEL NO:	PAGE 1 OF 1	
		DC JACK	DC00230	PAPER NO: A4	SCALE
	DESIGNER BY:	CHECK BY:	APPROVED BY:	3:1	VER
			丞永實業有限公司 BLUE SOURCES ELECTRONICS CO.,LTD.		