
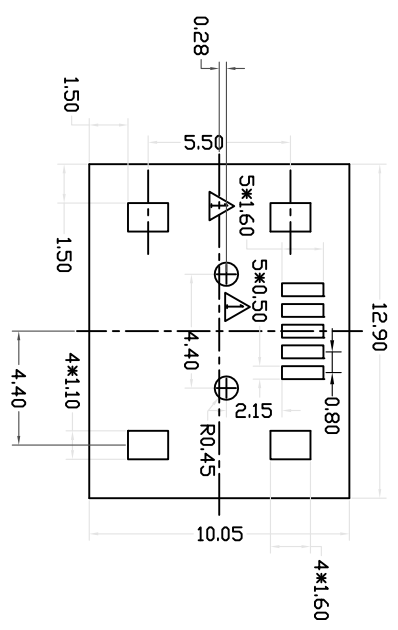



記號	設定內容	日期	修改	核准
MARK	MODIFICATION	DATE	DRAW	APPROVE
△	PCB LAYOUT 變更	2011.05.16		
△	總長調整為9.3mm,定位柱調整為R0.35	2019.03.09		

A/B
TYPE

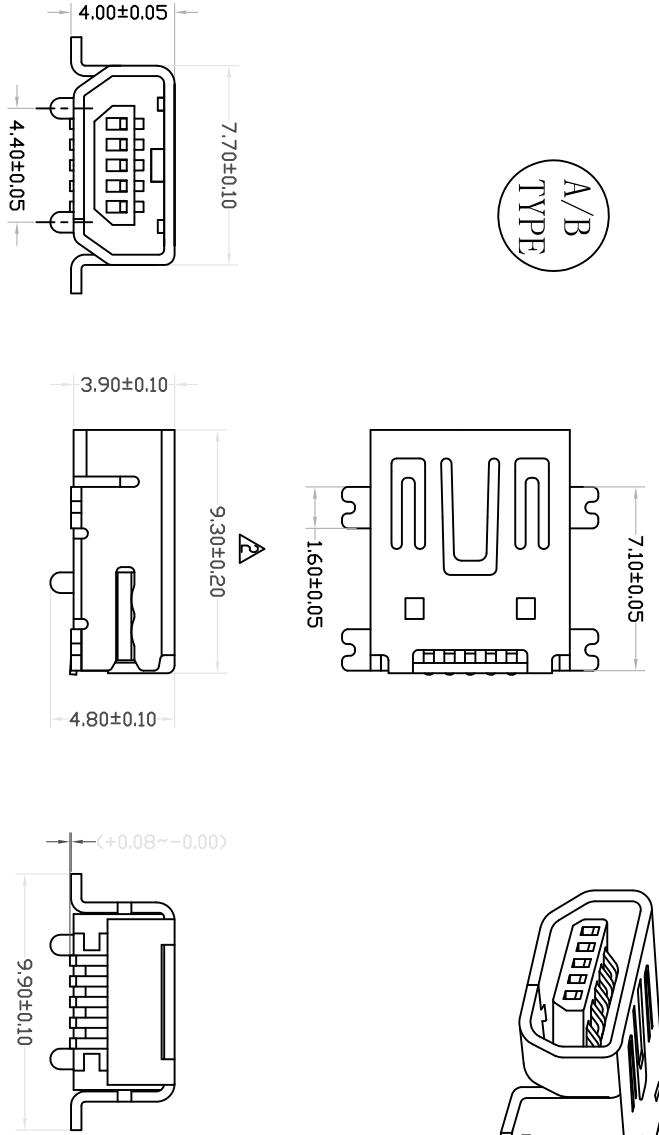

NOTE:

- MATERIAL:
 - HOUSING: LCP GLASS FIBRE UL94 V-0; BLACK
 - CONTACT: BRONZE T=0.25±0.02mm (SURFACE PLATING: Au1u"+Sn80~100u"+Ni60u")
 - SHEEL: BRONZE T=0.40±0.02mm (SURFACE PLATING: Ni100u"~120u")
- ELECTRIC:
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX
 - INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 - DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
 - OPERATING TEMPERATURE: -55°C~105°C



丞永實業有限公司 BLUE SOURCES ELECTRONICS CO.,LTD.				繪圖 / 日期 Draw By/Date		單位 Units		名稱 / 料號 Title / Part No.		MINTI USB 5P+AB TEMP SMT 打字 MU-CF0502-1B	
審核 / 日期 Check By/Date				比例 Scale		材質 Material		顏色 Color		版本 REV.	
批准 / 日期 App. By/Date				頁次 SHEET		角法 PROJ.		00		00	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:				±0.30		±3.0°		±2.0°		±1.0°	
.XX				±0.20		.XXX		.XXX		.XXX	
.XXX				±0.10		.XXX		.XXX		.XXX	
.XXX				±2.0°		.XXX		.XXX		.XXX	
.XXX				±1.0°		.XXX		.XXX		.XXX	