


P.C.B LAYOUT

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 0.03\Omega$
3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 5-20N
6. life test : 5,000 cycles

SCHEMATIC

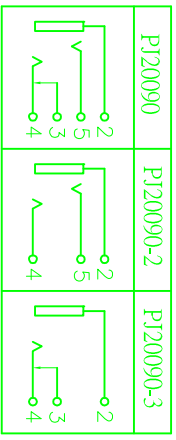

5	SPRING PIECE	1	BRONZE	Ag-Plating
4	SPRING PIECE	1	BRONZE	Ag-Plating
3	CONTACT FOOT	1	BRASS	Ag-Plating
2	CONTACT FOOT	1	BRONZE	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .x ±0.30 .xx ±0.20 .xxx ±0.10 x° ±3.0° .xx° ±2.0° .xxx° ±1.0°		UNIT: MM	TYPE: PHONE JACK	MODEL NO: PJ20090-X	PAPER NO: A4	PAGE 1 OF 1
DESIGNER BY:					SCALE 4:1	VER 3
CHECK BY:						
APPROVED BY:						