
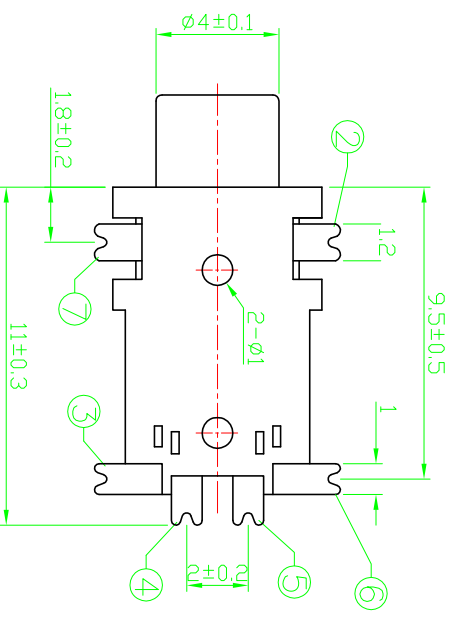


SCHEMATIC

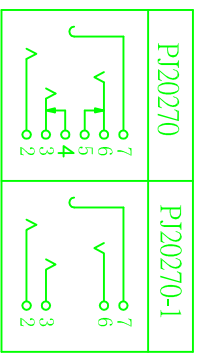

- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. life test : 5,000 cycles

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	<table border="1"> <tr> <td>x</td> <td>±0.30</td> </tr> <tr> <td>xx</td> <td>±0.20</td> </tr> <tr> <td>xxx</td> <td>±0.10</td> </tr> <tr> <td>x°</td> <td>±3.0°</td> </tr> <tr> <td>xx°</td> <td>±2.0°</td> </tr> <tr> <td>xxx°</td> <td>±1.0°</td> </tr> </table>		x	±0.30	xx	±0.20	xxx	±0.10	x°	±3.0°	xx°	±2.0°	xxx°	±1.0°
x	±0.30													
xx	±0.20													
xxx	±0.10													
x°	±3.0°													
xx°	±2.0°													
xxx°	±1.0°													
UNIT: MM	TYPE: PHONE JACK	MODEL NO: Pj20270-X	PAPER NO: A4	PAGE 1 OF 1										
DESIGNER BY:				SCALE										
CHECK BY:				VER										
APPROVED BY:				3:1										
				1										

承永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.