


SCHEMATIC

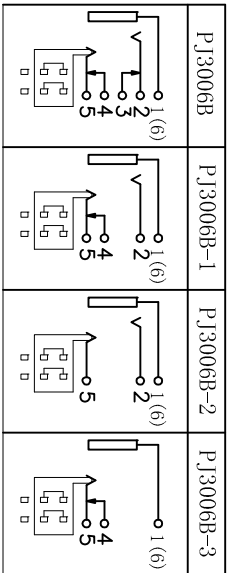

- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. Life test : 5,000 cycles

10	6# CONTACT FOOT	6	H62 BRASS T=0.35	Ag-Plating
9	SWITCH COVER	1	PAG6	
8	SWITCH	1	PAG6	
7	HOUSING	1	PAG6	
6	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
5	5# CONTACT FOOT	1	SUS301 T=0.25	Sn-Plating
4	4# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating
3	3# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE T=0.25	Sn-Plating
1	1# CONTACT FOOT	1	H62 BRASS T=0.5	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
XXX	±0.30
XX	±0.20
XXX	±0.10
.XX	±30°
.XX	±20°
.XXX	±1.0°

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	AJ3006B-X		SCALE 3:1
DESIGNER BY:				VER 1
CHECK BY:				
APPROVED BY:				

丞永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.