




P.C.B LAYOUT
TOP VIEW

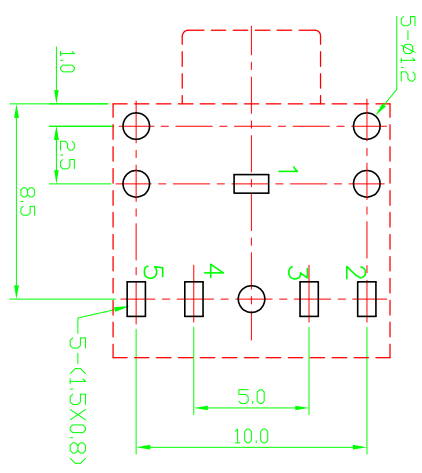

SPECIFICATION
 1.Rating : DC 30V 0.5A
 2.Contact resistance : $\leq 0.03\Omega$
 3.Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4.Withstand voltage : 500VAC
 5.Insertion and extraction force : 3-20N
 6.life test : 5,000 cycles

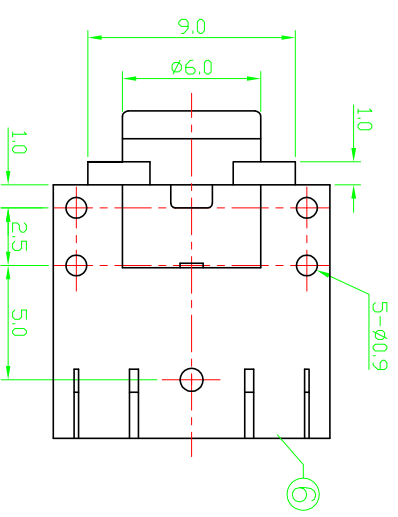

SCHEMATIC

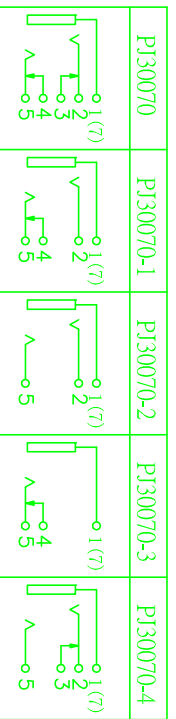

7	AXIS SUPPORT	1	BRASS	Ni-Plating
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	SUS301	Sn-Plating
4	4# CONTACT FOOT	1	BRASS	Sn-Plating
3	3# CONTACT FOOT	1	BRASS	Sn-Plating
2	2# CONTACT FOOT	1	SUS301	Sn-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNITS: MM	TYPE: EARPHONE JACK	MODEL NO: PJ30070-X	PAPER NO: A4	PAGE 1 OF 1
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				SCALE 3:1
-X ±0.30				VER 1
-XX ±0.20				
-XXX ±0.10				
-X° ±3.0°	DESIGNER BY:			
-XX° ±2.0°	CHECK BY:			
-XXX° ±1.0°	APPROVED BY:			

承永實業有限公司
 BLUE SOURCES ELECTRONICS CO.,LTD.