


P.C.B LAYOUT  
TOP VIEW

SCHEMATIC

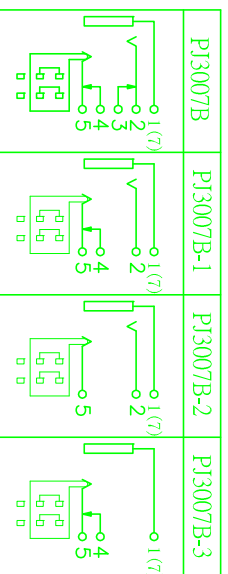

H	1.3
APPD	✓

- SPECIFICATION
1. Rating : DC 30V 0.5A
  2. Contact resistance :  $\leq 0.03\Omega$
  3. Insulation resistance :  $\geq 100M\Omega$  (DC250V)
  4. Withstand voltage : 500VAC
  5. Insertion and extraction force : 3-20N
  6. Life test : 5,000 cycles

10	CONTACT FOOT	6	H62 BRASS T=0.35	Ni底-Ag-Plating
9	SWITCH COVER	1	PF	
8	SWITCH HOUSING	1	POM	
7	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	SUS301 T=0.25	Ni底-Ag-Plating
4	4# CONTACT FOOT	1	H62 BRASS T=0.4	Ni底-Ag-Plating
3	3# CONTACT FOOT	1	H62 BRASS T=0.4	Ni底-Ag-Plating
2	2# CONTACT FOOT	1	SUS301 T=0.2	Ni底-Ag-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE T=0.2	Ni底-Ag-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	PJ3007B	A4	SCALE 3:1
				VER 1

UNLESS OTHERWISE SPECIFIED	OTHERWISE
XXX	±0.30
XXX	±0.20
XXX	±0.10
X°	±3.0°
XX°	±2.0°
XXX°	±1.0°

DESIGNER BY:		丞永實業有限公司
CHECK BY:		BLUE SOURCES ELECTRONICS CO.,LTD.
APPROVED BY:		