


SCHEMATIC

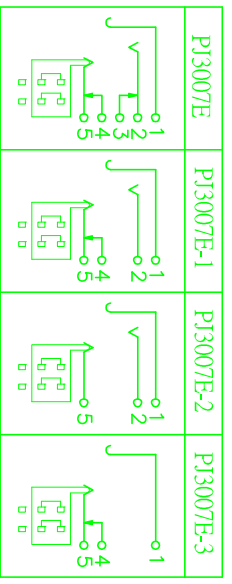

- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. Life test : 5,000 cycles

9	SWITCH COVER	1	PF			
8	SWTCH HOUSING	1	PA66			
7	CONTACT FOOT	6	H62 BRASS T=0.35	Ag-Plating		
6	HOUSING	1	PBT			
5	5# CONTACT FOOT	1	SUS301 T=0.25	Sn-Plating		
4	4# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating		
3	3# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating		
2	2# CONTACT FOOT	1	SUS301 T=0.2	Sn-Plating		
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE T=0.25	Sn-Plating		
NO.	DESCRIPTION	QTY	MATERIAL	PLATING		
UNIT:MM		TYPE:	MODEL NO:	PAGE 1 OF 1		
DESIGNER BY:		PHONE JACK	PJ3007E-X	PAPER NO: A4	SCALE	VER
CHECK BY:					3:1	1
APPROVED BY:						

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.x	± 0.30
.xx	± 0.20
.xxx	± 0.10
.x°	$\pm 3.0°$
.xx°	$\pm 2.0°$
.xxx°	$\pm 1.0°$

承永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.