


P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : $\leq 0.03\Omega$
3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

SCHEMATIC

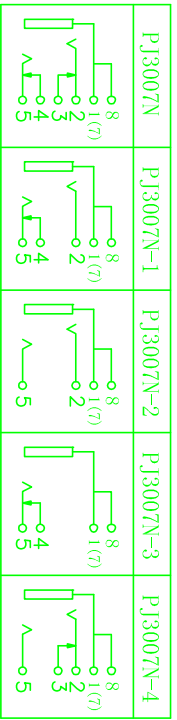

8	SPRING	1	SUS301 T=0.2	Ni-Plating
7	AXIS SUPPORT	1	H59 BRASS	Ni-Plating
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	SUS301 T=0.2	Sn-Plating
4	4# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating
3	3# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating
2	2# CONTACT FOOT	1	SUS301 T=0.2	Sn-Plating
1	1# CONTACT FOOT	1	BRONZE T=0.2	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X	±0.30
XX	±0.20
XXX	±0.10
X°	±3.0°
XX°	±2.0°
XXX°	±1.0°

UNIT: MM	TYPE:	MODEL NO:
	PHONE JACK	PJ3007N-X
DESIGNER BY:		
CHECK BY:		
APPROVED BY:		

PAPER NO: A4	PAGE 1 OF 1
SCALE 3:1	VER 1

丞永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.