
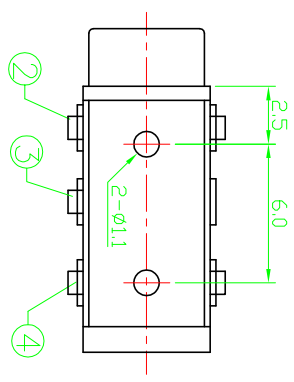


SCHEMATIC



- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
4	3#CONTACT FOOT	1	SUS301	Ag-Plating
3	2#CONTACT FOOT	1	BRONZE	Ag-Plating
2	1#CONTACT FOOT	1	BRONZE	Ag-Plating
1	HOUSING	1	PBT	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X°	±3.0°
.XX	±0.20
.XXX	±0.10
.XXX°	±1.0°

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	PJ30130-X		VER
DESIGNER BY:				3:1
CHECK BY:				1
APPROVED BY:				

丞永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.