


P.C.B LAYOUT
TOP VIEW

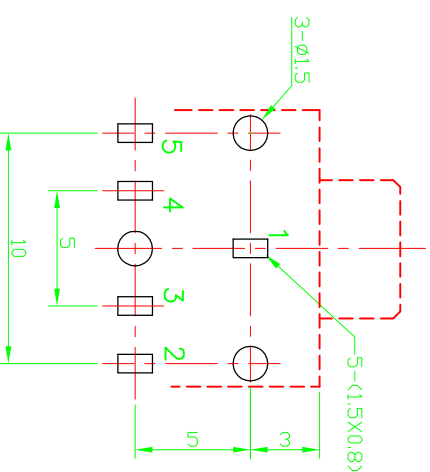

SCHEMATIC

PJ3017G	PJ3017G-1	PJ3017G-2	PJ3017G-3	PJ3017G-5

- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. Life test : 5,000 cycles

8	SPRING	1	SUS301 T=0.2	Ni-Plating
7	COVER	1	PBT	
6	HOUSING	1	PBT	
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE T=0.3	Sn-Plating
4	4# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating
3	3# CONTACT FOOT	1	H62 BRASS T=0.4	Sn-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE T=0.25	Sn-Plating
1	1# CONTACT FOOT	1	H62 BRASS T=0.5	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1	
x	±0.30	PHONE JACK		PJ3017G		SCALE	VER
xxx	±0.20					3:1	1
xxx	±0.10						
x°	±3.0°						
xx°	±2.0°						
xxx°	±1.0°						
DESIGNER BY:							
CHECK BY:							
APPROVED BY:							

承永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.