
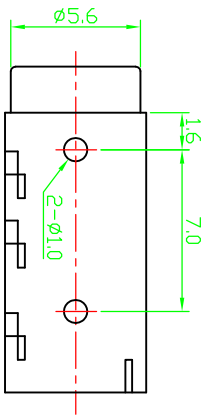


P.C.B LAYOUT
TOP VIEW



- SPECIFICATION**
- 1.Rating :DC 30V 0.5A
 - 2.Contact resistance : $\leq 0.03\Omega$
 - 3.Insulation resistance : $\geq 100M\Omega$ (DC250V)
 - 4.Withstand voltage :500VAC
 - 5.Insertion and extraction force :3-20N
 - 6.life test :5,000 cycles

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X	±0.30
.XX	±0.20
.XXX	±0.10
.X°	±3.0°
.XX°	±2.0°
.XXX°	±1.0°

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	4#CONTACT FOOT	1	SUS301	Ag/Au-Plating
4	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag/Au-Plating
3	2#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag/Au-Plating
2	1#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag/Au-Plating
1	HOUSING	1	PBT	

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	PJ3020A-X		SCALE 3:1
				VER 1
DESIGNER BY:				
CHECK BY:				
APPROVED BY:				

承永實業有限公司
BLUE SOURCES ELECTRONICS CO.,LTD.