



**SCHEMATIC**



**P.C.B LAYOUT  
TOP VIEW**

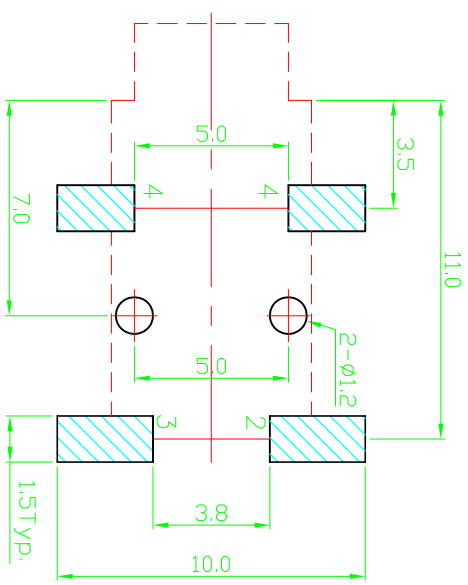

**SPECIFICATION**

1. Rating : DC 30V 0.5A
2. Contact resistance :  $\leq 0.03\Omega$
3. Insulation resistance :  $\geq 100M\Omega$  (DC250V)
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

TOLERANCE	OTHERWISE SPECIFIED	TOLERANCES ARE
x	±0.30	
xx	±0.20	
xxx	±0.10	
.x	±3.0°	
.xx	±2.0°	
.xxx	±1.0°	

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
4	3#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
3	2#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	1#CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PA9T	

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	PJ3021A-X		SCALE VER
DESIGNER BY:				4:1 1
CHECK BY:				
APPROVED BY:				

丞永實業有限公司  
BLUE SOURCES ELECTRONICS CO.,LTD.