



P.C.B LAYOUT
TOP VIEW

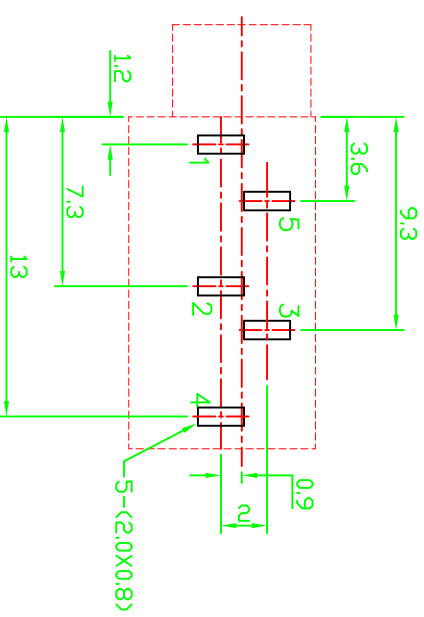

SCHEMATIC

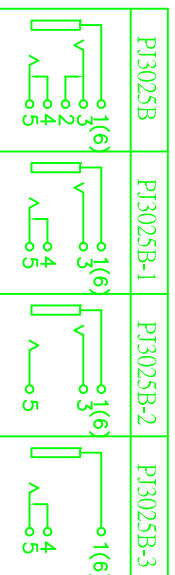

- SPECIFICATION
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. Life test : 5,000 cycles

8	HOUSING	1	PBT	
7	COVER	1	PBT	
6	AXIS SUPPORT	1	BRASS	Ni-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
4	CURVE PIECE	1	BRASS	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	CURVE PIECE	1	BRASS	Sn-Plating
1	FLAT PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNITS: MM		TYPE: PHONE JACK		MODEL NO: PJ3025B-X		PAPER NO: A4		PAGE 1 OF 1	
DESIGNER BY:		CHECK BY:		APPROVED BY:		SCALE: 3:1		VER: 1	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		X: ±0.30		X: ±0.20		X: ±1.0°		X: ±2.0°	
X: ±0.10		X: ±1.0°		X: ±2.0°		X: ±1.0°		X: ±2.0°	