


P.C.B LAYOUT
TOP VIEW

SCHEMATIC

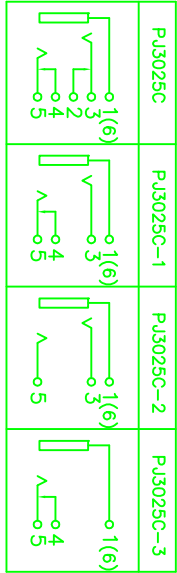

8	HOUSING	1	PBT	
7	COVER	1	PBT	
6	AXIS SUPPORT	1	BRASS	Ni-Plating
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
4	CURVE PIECE	1	BRASS	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	CURVE PIECE	1	BRASS	Sn-Plating
1	FLAT PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

SPECIFICATION

1. Rating : DC 30V 0.5A
2. Contact resistance : ?0.03Ω
3. Insulation resistance : ?100MΩ (DC250V)
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-20N
6. life test : 5,000 cycles

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
x	±0.30	DESIGNER BY:	PHONE JACK	PI3025C-X		SCALE
xx	±0.20	CHECK BY:				VER
xxx	±0.10	APPROVED BY:				3:1
x°	±3.0°					1
xx°	±2.0°					
xxx°	±1.0°					