



P.C.B LAYOUT
TOP VIEW

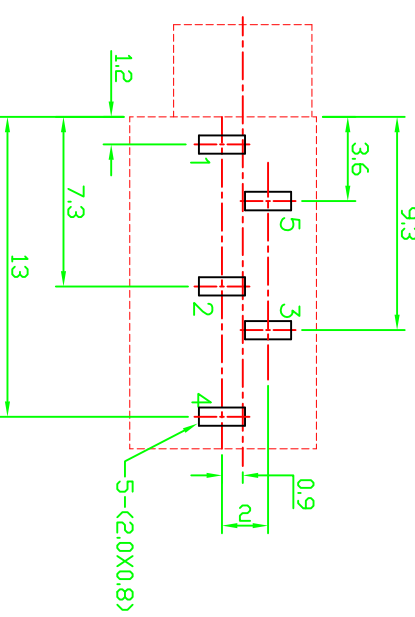

SCHEMATIC

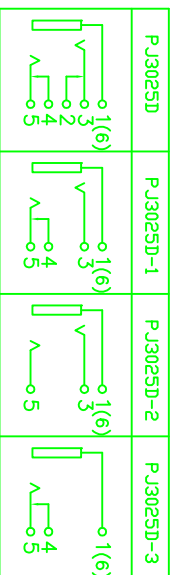

TOLERANCE :
 0.000 ±0.10mm
 0.00 ±0.20mm
 0.0 ±0.30mm

- SPECIFICATION**
1. Rating : DC 30V 0.5A
 2. Contact resistance : $\leq 0.03\Omega$
 3. Insulation resistance : $\geq 100M\Omega$ (DC250V)
 4. Withstand voltage : 500VAC
 5. Insertion and extraction force : 3-20N
 6. Life test : 5,000 cycles

7	HOUSING	1	PBT	
6	COVER	1	PBT	
5	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
4	CURVE PIECE	1	BRASS	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Sn-Plating
2	CURVE PIECE	1	BRASS	Sn-Plating
1	FLAT PIECE	1	BRASS	Sn-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNIT: MM

TYPE: PHONE JACK

MODEL NO: PJ3025D-X

PAPER NO: A4 PAGE 1 OF 1

DESIGNER BY:

CHECK BY:

APPROVED BY:

TOLERANCE ANGLES SCALE VER
 ± 0.15 $\pm 1.5^\circ$ 3:1 1