

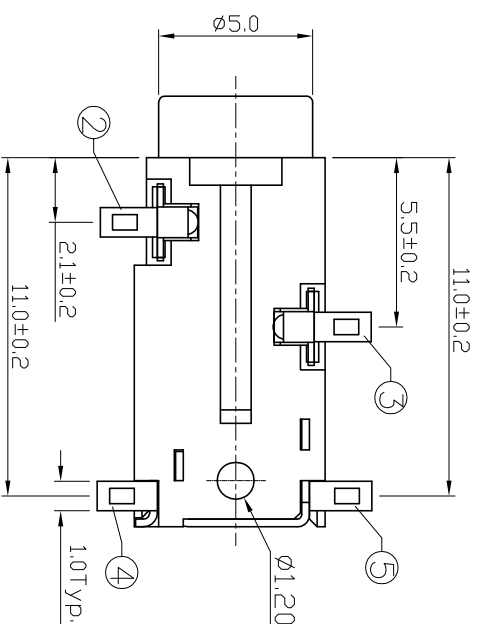


SCHEMATIC



P.C.B LAYOUT

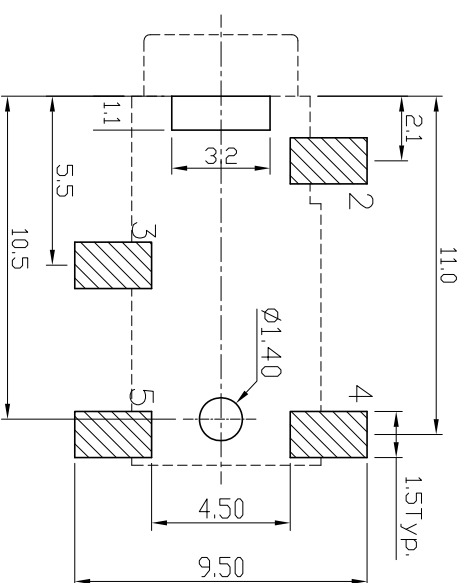

- SPECIFICATION**
- 1.Rating : DC 30V 0.5A
 - 2.Contact resistance : $\leq 0.03\Omega$
 - 3.Insulation resistance : $\geq 100M\Omega$ (DC250V)
 - 4.Withstand voltage : 500VAC
 - 5.Insertion and extraction force : 3-20N
 - 6.life test : 5,000 cycles

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
5	CURVE PIECE	1	BRASS	Ag-Plating
4	SPRING	1	Be-Cu	Ag-Plating
3	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
2	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag-Plating
1	HOUSING	1	PAVT	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X	±0.30
XX	±0.20
XXX	±0.10
X*	±3.0°
XX*	±2.0°
XXX*	±1.0°

UNIT: MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	PHONE JACK	PJ30810-X		SCALE VER
DESIGNER BY:				4:1 1
CHECK BY:				
APPROVED BY:				

丞永實業有限公司
BLUE SOURCES ELECTRONICS CD,LTD.