

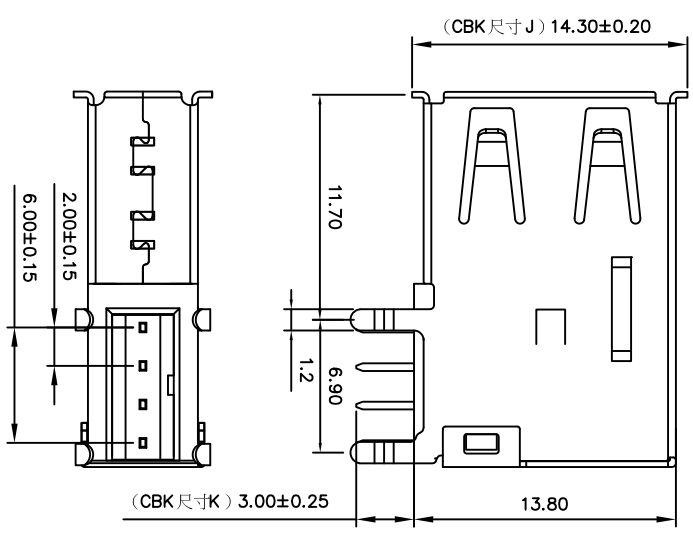
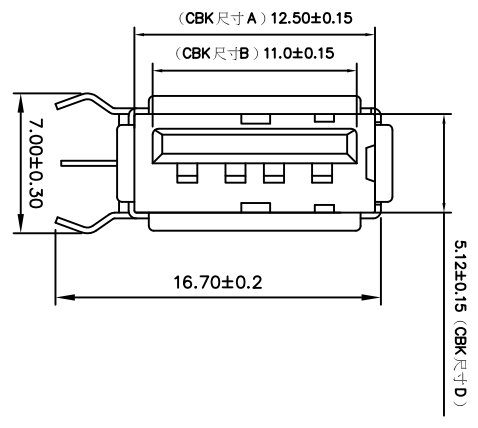


記號	設備	日期	修改	核准
△	模具修整, 尺寸微調	2015.12.14.		

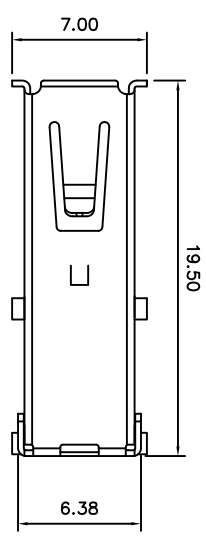

SPECIFICATIONS:
 Contact current Rating:
 1.5 Amperes for pin 1 & pin 4.
 Dielectric Withstanding Voltage: AC 500V(RMS)
 Insulation resistance: 1000Megohms Minimum.
 Contact Resistance:
 30mΩ Max for pin 1 & pin 4
 Mechanical Characteristics:
 Mating Force: 35 Newtons. Maximum
 Unmating Force: 10 Newtons. Minimum.

MATERIAL:
 Housing: PBT+30%GF 94V-0
 Contact: copper alloy(T=0.25mm)
 Shell: SPCC

PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated
 operating Temperature: -45° to +85°

丞永实业有限公司 BLUE SOURCES ELECTRONICS CO, LTD.		品名 / 料號 Title / Part No.	90°黑膠成品(外扣) USB-1F0411-1B(02版)
Draw By/Date 彭錫華 2008.03.04	Units	MM	
Check By/Date	比例 Scale	1:1	顏色 Color
App. By/Date 鄭春偉 2008.03.05	頁次 SHEET	1/1	版本 REV.
		角法 PROJ.	01