
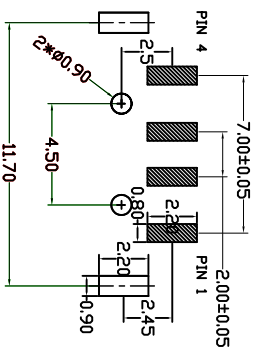
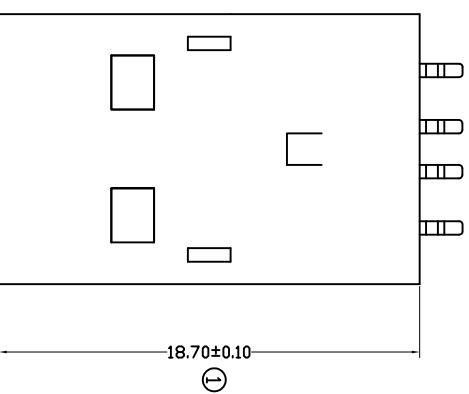
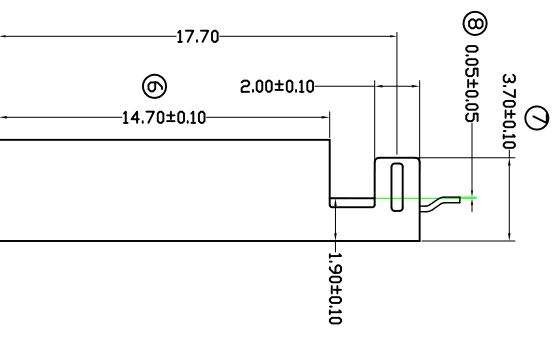
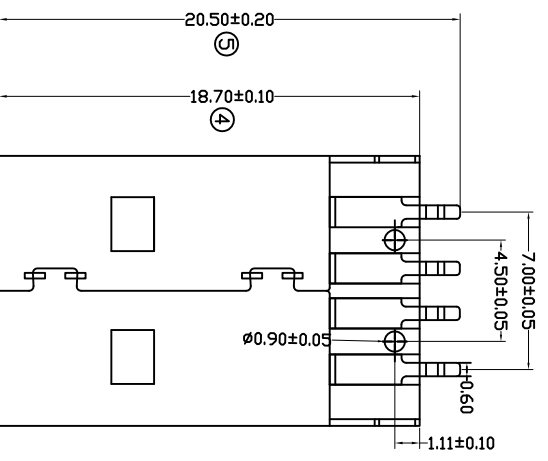



記號 MARK	設置內容 MODIFICATION	日期 DATE	修改 DRAW	核准 APPROVE
△				



LAYOUT P.C.B

NOTE:

- MATERIAL:
 - HOUSING: PA9T GLASS FIBRE UL94 V-0 ; BLACK
 - CONTACT : BRASS T=0.25±0.02mm
 - SURFACE PLATING: Au30u"+Sn80~100u"+Ni160u")
 - SHELL: SPCC-SD-OILED; T=0.30±0.02mm
 - SURFACE PLATING: Cu80~100u"+Ni100~120")
- ELECTRIC:
 - CONTACT RESISTANCE: 30 MILLIOHMS MAX
 - INSULATION RESISTANCE: 1000 MEGA OHMS MIN
 - DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL
 - OPERATING TEMPERATURE: -55°C~ 85°C

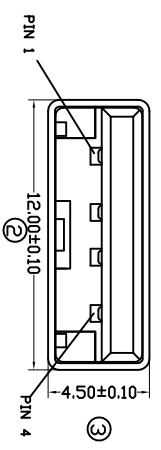

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	±0.30
.X	±0.20
.XX	±0.10
.XXX	±1.0°
.X°	±3.0°
.XX°	±2.0°
.XXX°	±1.0°

承永實業有限公司 BLUE SOURCES ELECTRONICS CO.,LTD.		繪圖 / 日期 Draw / Date	2008.01.06	單位 Units	MM	名稱 / 料號 Title / Part No.	USB AM 2.0版(SMT 2.0版) 集線器成品(13枚)
審核 / 日期 Check By/Date	批准 / 日期 App. By/Date	比例 Scale	1:1	材質 Material		角法 PRDL	
		頁次 SHEET	1/1	版本 REV.			00