
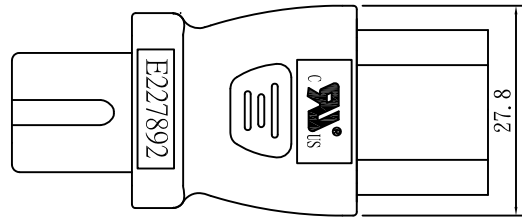
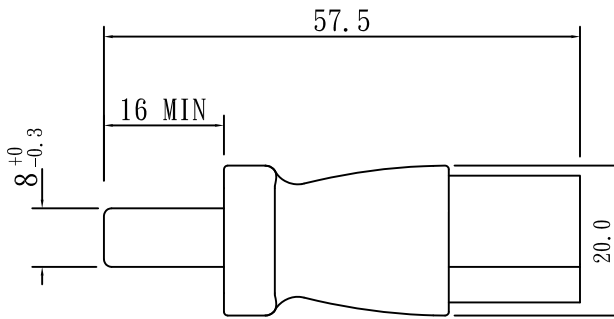
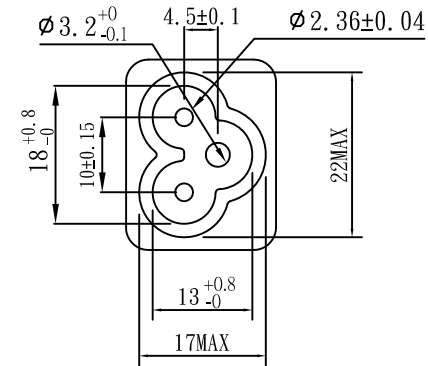
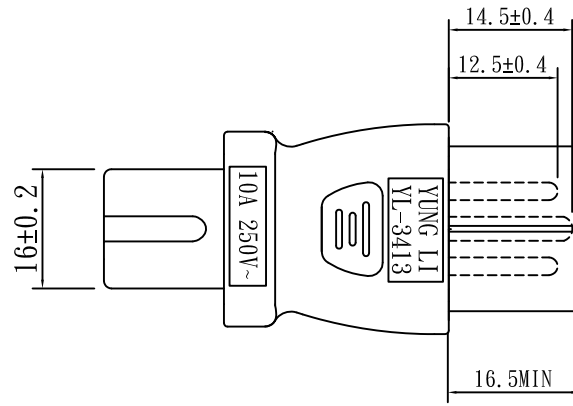


Note:

- 1.Rating:10A 250V
- 2.Insulation Resistance:100MΩ
- 3.Dielectric Voltage:2000V/sec

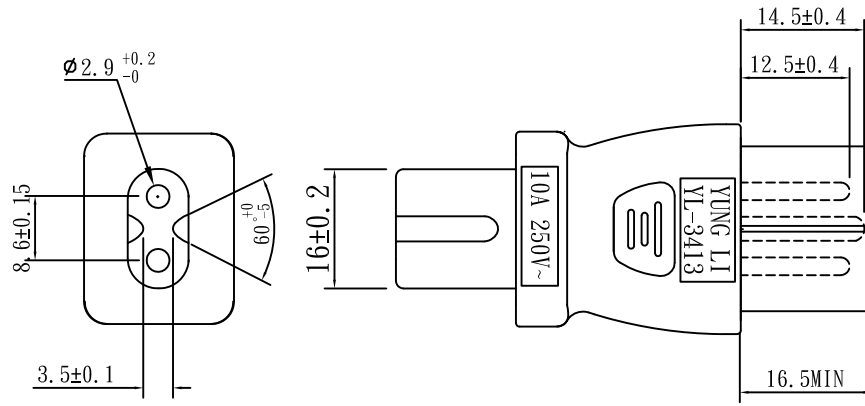

注:所有轉接頭顏色依訂單要求,此圖面不鏽顏色

1. 1015 18AWG
(棕色L=24mm 藍色L=24mm)
2. YP-34插座(R-30704) 1PC
3. 端子:98714三爪磷青銅管 2PCS
4. 內模YC-13L 1PC 禾盛興
5. 膠料:50P
6. 小夾鏈帶:110X75X0.06mm 1PC
(W=110 L=75)需有黑色環保標志

一般寸法公差: >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	核準		日期		丞永實業有限公司 Blue Sources Electronics CO,LTD.			
	審核		日期					
	制圖	黃方	日期	06.6.13	客戶編號			
	型號	YL-3413			客戶料號			
	料號				材質	P.V.C	單位	mm
	圖號	CY-A3413	版本	B	比例	1:1	